



The high security interlocking door

Circlelock은 보안 구역으로의 무단 침입을 방지하는 원형 인터락킹 도어 시스템입니다. 여러 인증 시스템을 출입문에 적용하여, piggybacking(따라 들어가는 행위)을 감지하고 가능한 최고의 보안 수준에 도달 할 수 있습니다.

Circlelock 부스는 건물의 건축 양식에 스타일리시하게 어우러지도록 맞춤 제작이 가능합니다.

Two curved sliding doors

Circlelock은 두개의 슬라이딩 도어가 상호 연동(interlock)되어, 각 도어가 차례로 열리는 보안 부스입니다. Circlelock은 순차적으로 나가고 들어갈 수 있는 양방향 보안 도어입니다.

High security entrances

저희 Circlelock은 높은 수준의 보안을 유지하면서도, 작동 속도 및 편의성이 요구되는 영역에서 찾아볼 수 있습니다. Circlelock이 설치된 구역은 보안요원과 같은 제3자에 의한 감시가 더이상 필요하지 않습니다. Circlelock은 흔히 정부 청사, 은행, 공항 및 법인 사무실과 같은 곳에서 찾으실 수 있습니다.


Standard dimensions and capacity

D Diameter (mm)	A Canopy height (mm) ¹	B Height Under Canopy (mm) ²	C Throat opening (mm)	E Installation width (mm)	Capacity # persons per minute ³	Escape route	Disabled access
1000	200	2200	680	1077	1 x 4	-	-
1500	200	2200	1030	1577	1 x 4		

¹Optional canopy heights 200-600 going up by 100 mm

²Optional HUC's available 2100-2600 going up by 50 mm
Other heights are available on request.

³In one direction at a time. With bi-directional passage allowing 5 to 6 users per minute. Excluding authorisation system throughput time.

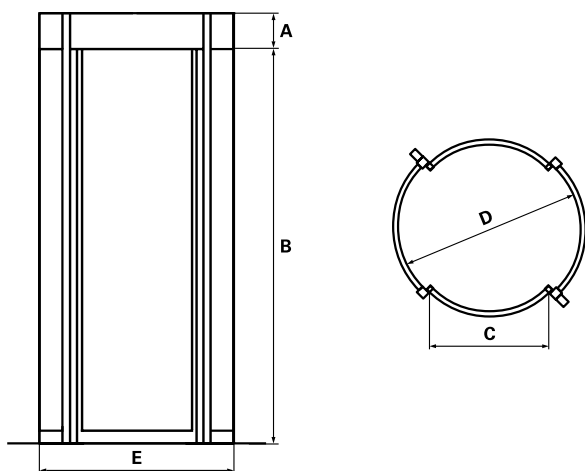

Technical specifications

Power supply	200-240 VAC, 50/60 Hz
Power consumption:	
Operating	65 W
Stationary	45 W
Fuse	External power supply fused with 16 A slow
Compatibility	The Circlelock is compatible with a number of access control system by using potential-free contacts

High quality

At Boon Edam, we take quality seriously; the quality of the materials we use, the quality of our employees as well as the quality of our partners. As with all Boon Edam products, the Circlelock is manufactured to the highest standards, is CE approved and complies with the Machine Directive (98/37/EEC), the EMC Directive (89/336/EEC) and the Low Voltage Directive (93/68/EEC).



Distributor